


DATA SHEET 22.9

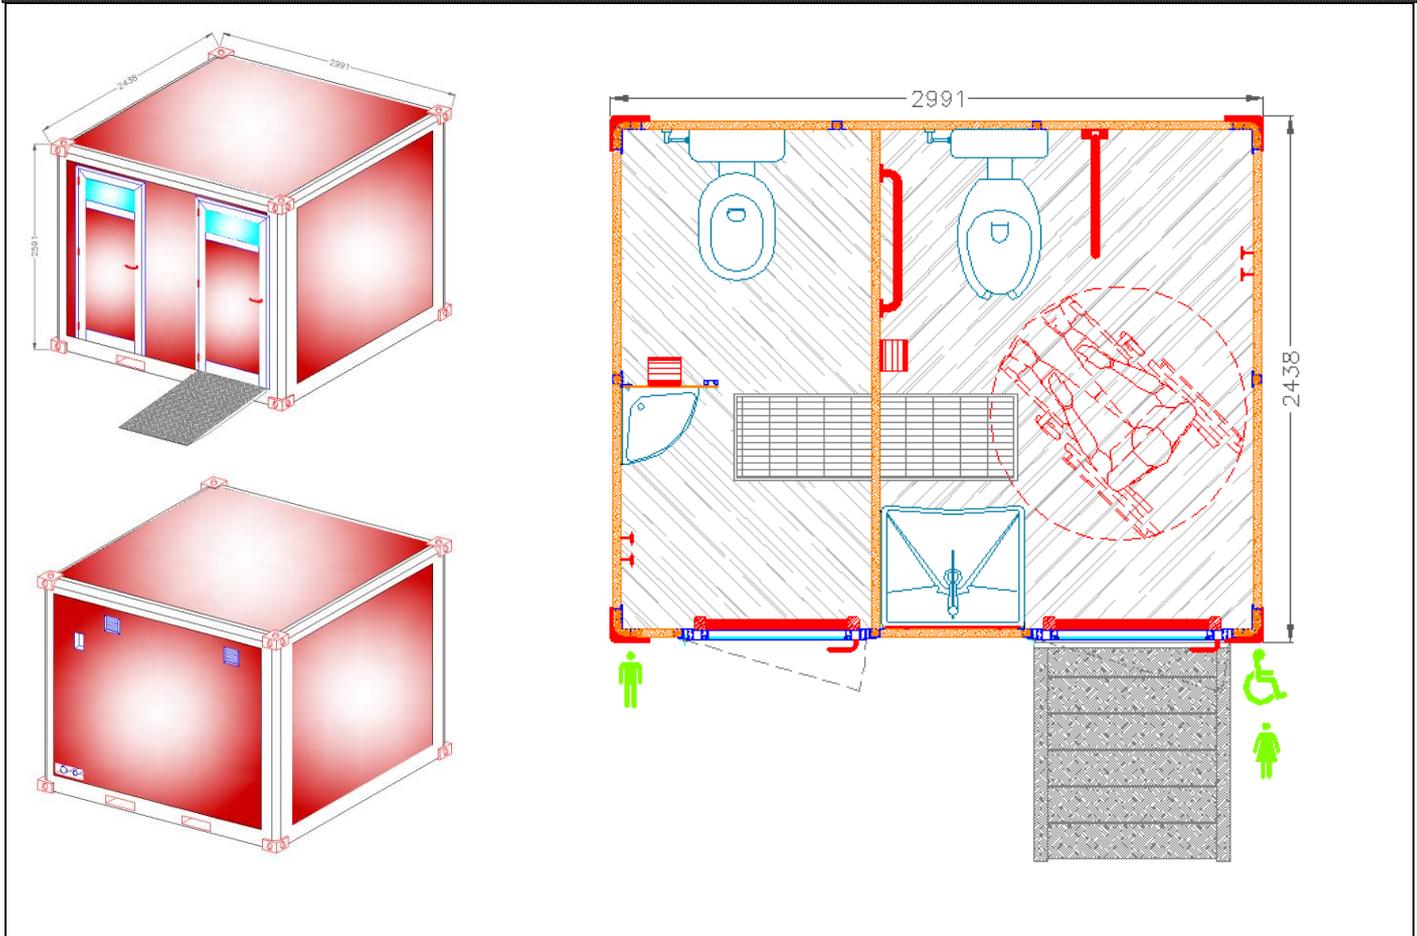

Monobloc container ISO-10-foot-1DX with 2 cabins: Men / Women + disabled

MOD. CONSI10-2C-PR-U/D/HP2

- | | |
|--|--|
| <p>a) Sturdy support structure of bent aluminum profiles (alloy 6082) and/or molded profiles welded into the joints to form a self-supporting monobloc shelter, equipped with ISO corner blocks and positioned according to ISO-10 foot-standard dimensions</p> <p>b) Transportable with all compatible systems for standard ISO containers and/or ordinary vehicles with suitable anchorage.</p> <p>c) Access platforms and stairs completely made of aluminum and removable from the structure.</p> <p>d) Stainless-steel floor with non-slip surface on water-repellent multilayer wood base.</p> <p>e) Galvanized gratings flush with floor recessed stainless steel drainage channels for optimum cleaning of the interior.</p> <p>f) Partition walls made of insulated aluminum panels and/or lacquered laminate without retaining profiles, therefore perfectly disinfectable.</p> <p>g) External walls lined with sandwich panels made of double 1+1mm thick painted aluminum sheet and 40mm thick polyurethane insulation.</p> <p>h) Exterior windows made of aluminum profiles and "polycarbonate glazing", as well as anti-panic push bar on the doors.</p> <p>i) Separate access for each individual cabin.</p> <p>j) Installation of an awning or veranda possible to cover the access area (on request).</p> <p>k) Exterior paint (with RAL colors) and labeling according to customer requirements.</p> | <p>1. Power supply from external 220V mains via protected CEE plug.</p> <p>2. Internal electrical control box for external branches and distributions to various users such as lighting and sockets with safety devices in accordance with applicable regulations.</p> <p>3. Earthing system with connection and relative piles.</p> <p>4. Internal corner area for control box and system control accessories with corresponding leads and distributions.</p> <p>5. two separate cabins, each equipped with:
 > Men's compartment: From the front door of the cabin, the toilet area is distinguished by a toilet bowl and cistern and various accessories. On a vertical partition are attached the sink and the mirror.
 > Compartment for ladies and the disabled: Next to the entrance there is a specially shaped sink and grab bars on the back wall and a handicapped accessible toilet. The same cabin is also suitable for female users. Mirrors, shelves, clothes hooks and other accessories are attached accordingly.</p> <p>6. Hydraulic system with external network connection, time-controlled taps, exhaust air system. Quick couplings and flexible pipes included.</p> <p>7. Wall fan for each cabin with automatic activation (on request).</p> <p>8. Pipes, eventual flexible tanks and sewage treatment pump (available on request for occasional applications) and external connection accessories for discharges.</p> |
|--|--|

Price: ex works Gruaro (Venice), Italy

1. MOD. CONSI10-2C-PR-U/D/HP2 (incl. WC and a.m. equipment): Euro/pcs. _____ + VAT

